

# E1WF Ex d IIC / Ex e II

## KCA472 Series



**The E1WF weatherproof hazardous gland is a dual seal high performance cable gland for steel wire armoured cables.**

### Features and benefits:

- Brass indoor and outdoor cable gland for use in hazardous areas
- Suitable for circular, galvanised steel wire armour cables with extruded polymeric bedding and oversheath
- Achieves IP66 seal onto cable and to enclosure with suitable sealing washer or thread sealant
- Three part armour lock provides mechanical cable retention and electrical continuity
- Inner PCP seal grips cable bedding and provides additional ingress protection
- Suitable for most climatic conditions - weatherproof and waterproof
- Standard and Nickel plated versions available
- Full Installation Instructions supplied

### Kit comprises:

E1WF Gland  
Brass Earth Tag  
Brass Locknut  
Nylon Sealing Washer  
PVC Shroud  
(2 per kit up to and including 25mm size)



### May be used in:

- Zones 0, 1 & 2 with Ex ia IIA, B & C equipment
- Zones 1 & 2 with Ex ib IIA, B & C equipment
- Zones 1 & 2 with Ex e II equipment
- Zones 2 with Ex nA II equipment
- Zone 21 & 22 with Ex tD A21

### Where the cable is effectively filled, may also be used in:

- Zones 1 & 2 with Ex d IIC equipment not containing a source of ignition & with a volume less than 2000cm<sup>3</sup>
- Zones 1 & 2 with Ex d IIA & Ex d IIB equipment not containing a source of ignition & with any volume
- Zone 1 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with a volume less than 2000cm<sup>3</sup>
- Zone 2 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with any volume
- Zone 2 with Ex nR II equipment

## Technical Information:

Certified II 2GD, Ex e II & Ex d IIC under ATEX directive 94/9/EC

Atex Compliance Standards: EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1

Certificate number Sira 02ATEX3092X


IECEx Compliance Standards: IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 61241-0, IEC 61241-1

Certificate number IECEx SIR 10.0071X

Service temperature range -60°C to +90°C

## Specifications

Gland Kit Reference				Cable Dimensions mm					Gland Dimensions mm				
Design Reference		Size	Qty per Kit	Under Armour Ø (A)		Overall Ø (B)		Armour Wire Ø	Entry Thread (D)	Thread Length (E)	Protrusion Length (F)	Hexagon	
Standard	Nickel Plated			Min	Max	Min	Max					A/F (G)	A/C (H)
KCA472-51	KCA472-51V	16	2	3.8	8.7	8.0	13.2	0.9	M16 × 1.5	15	41	23.4	26.7
KCA472-71	KCA472-71V	20SS	2	3.8	8.7	8.0	13.2	0.9	M20 × 1.5	15	41	23.4	26.7
KCA472-52	KCA472-52V	20S	2	8.0	11.8	8.0	15.8	0.9 / 1.25	M20 × 1.5	15	43	25.7	29.2
KCA472-53	KCA472-53V	20	2	11.8	14.2	11.7	20.8	0.9 / 1.25	M20 × 1.5	15	43	30.5	34.0
KCA472-55	KCA472-55V	25	2	14.0	20.1	17.0	27.2	1.25 / 1.6	M25 × 1.5	15	48	37.6	42.2
KCA472-56	KCA472-56V	32	1	19.7	26.6	23.5	33.5	1.6 / 2.0	M32 × 1.5	15	53	47.2	53.6
KCA472-57	KCA472-57V	40	1	26.6	32.4	29.0	39.9	1.6 / 2.0	M40 × 1.5	15	56	56.4	61.5
KCA472-58	KCA472-58V	50S	1	32.4	38.4	38.0	46.2	2.0 / 2.5	M50 × 1.5	15	61	60.0	66.0
KCA472-59	KCA472-59V	50	1	38.4	44.3	39.5	52.6	2.0 / 2.5	M50 × 1.5	15	61	70.1	77.2
KCA472-60	KCA472-60V	63S	1	44.3	50.3	50.0	58.9	2.5	M63 × 1.5	15	64	75.0	83.0
KCA472-61	KCA472-61V	63	1	50.3	56.2	51.3	65.3	2.5	M63 × 1.5	15	64	80.0	87.4
KCA472-62	KCA472-62V	75S	1	56.2	62.2	62.0	71.6	2.5	M75 × 1.5	15	73	90.2	99.1
KCA472-63	KCA472-63V	75	1	62.2	68.1	62.5	78.0	2.5	M75 × 1.5	15	73	98.8	109.2
KCA472-64	KCA472-64V	85	1	68.0	74.0	68.0	88.0	3.15	M80 × 2.0	20	102	115.1	126.0

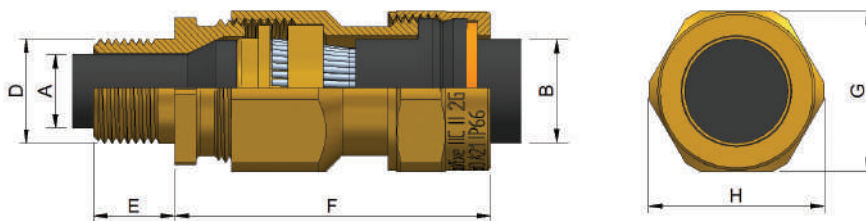

**Prysmian Cables & Systems Limited,**  
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

**Commercial Enquiries,**  
Sales Office Tel: 0845 767 8345,  
International Sales Office Tel: +44 2380 295481

[www.biconcomponents.co.uk](http://www.biconcomponents.co.uk)