


## UC<sup>CONNECT</sup> Cat5e UTP 180°Keystone Punch Down Jack

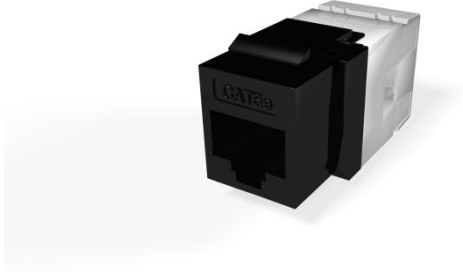

### Cat5e UTP 180°Keystone Punch Down Jack


- Cat5e compliant performance
- UL94V-0
- Fully compatible with our full range of faceplates
- Fits into 25 mm back-box
- Fits into standard floor box plates

## Specification

Item	Description
RJ45 Plastic housing	ABS + PC
RJ45 jack contact material and finish	Phosphor Bronze  Contact area : Min 3 mm 50 micro-inch Gold plated over Nickel colour
IDC terminal and finish	Phosphor Bronze with min, 50 micro-inch Tin plated
Wire size compatibility	23-26 AWG solid wire
Housing	ABS
Dimensions	31mm x 21mm x 16.5mm
<b>Performance</b>	
IDC cap colour code supports both wiring schemes TIA 568A & 568B	
Insertion force	900 gm for 8 contacts
Retention strength	7.7kg between jack and plug
Operating temperature	-10°C to 60°C
Durability	Jack 750 cycles

# UC<sup>CONNECT</sup> Cat5e UTP 180°Keystone Punch Down Jack

## Construction

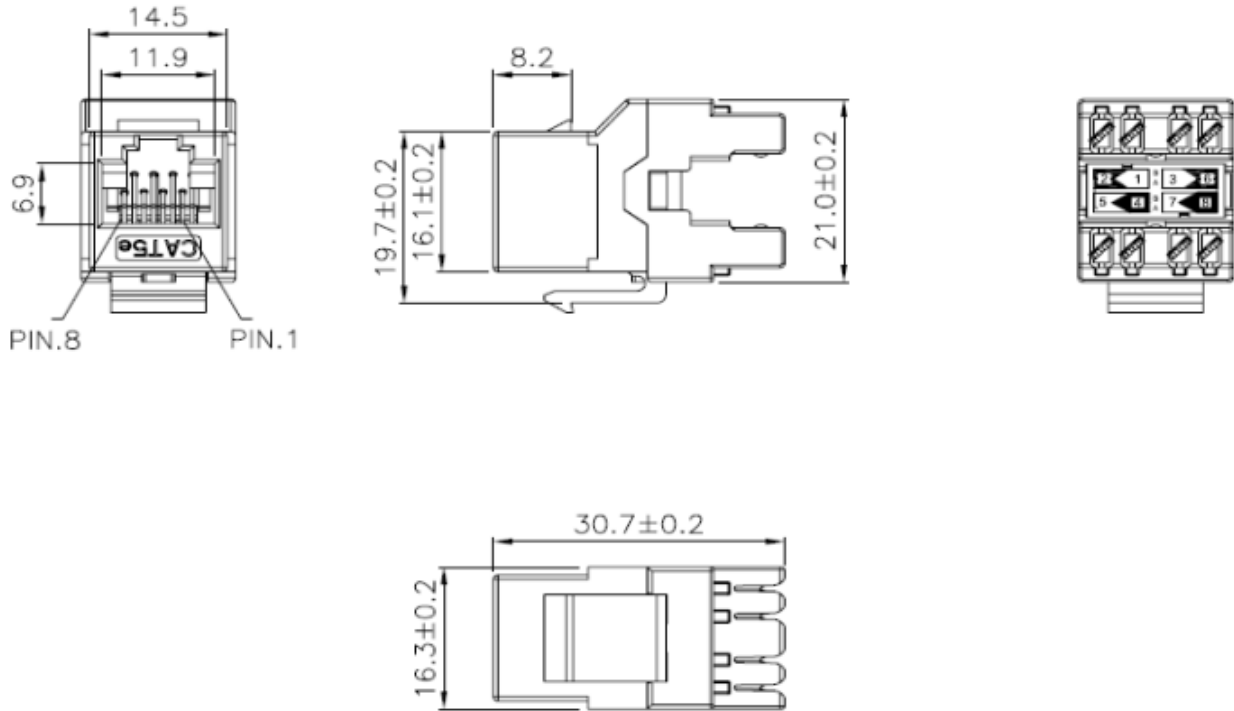

## Technical data

Material Code	Material Description	Description Code	Weight	Items per Packaging Unit
1021255	YMJBPO0095 Cat5e UTP Keystone Jack 180° Punchdown in Black	UC C300 MJ TR U BK	9,8g	1 or 50
<b>Related Products</b>				
Material Code	Material Description	Description Code	Weight	Items per Packaging Unit
1021284	YPPBP00109 1U 24-port UTP Cat.5e Keystone Panel with Rear Management in Black	UC C300 PP U BK 24 1U	720g	1 or 15
1021333	YAABP00127 Angled Single Port Adaptor 25 X 50	UC CACC AA 01 EU	8g	1 or 50
1021337	YMABP00131 LJ6C Flat Single Adaptor 38 X 25	UC CACC MA 01 6C	8g	1 or 50
1021338	YAABP00132 LJ6C Angled Single Adaptor 38 x 25	UC CACC AA 01 6C	8g	1 or 50
1021329	YMABP00123 Flat Single Adaptor 25 x 50	UC CACC MA 01 EU	8g	1 or 50
1021332	YFPBP00126 Dual port UK frame 86x86 (LJ6C Type)	UC CACC FP 02 6C	8g	1 or 50

© PRYSMIAN GROUP 2013, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.