




Draka

UC DATA CABLE

A FAST, RELIABLE AND UBIQUITOUS PART OF THE
DRAKA OFFICE NETWORK SOLUTION

UC400 Cat.6 U/UTP HD - U/UTP Installation cable

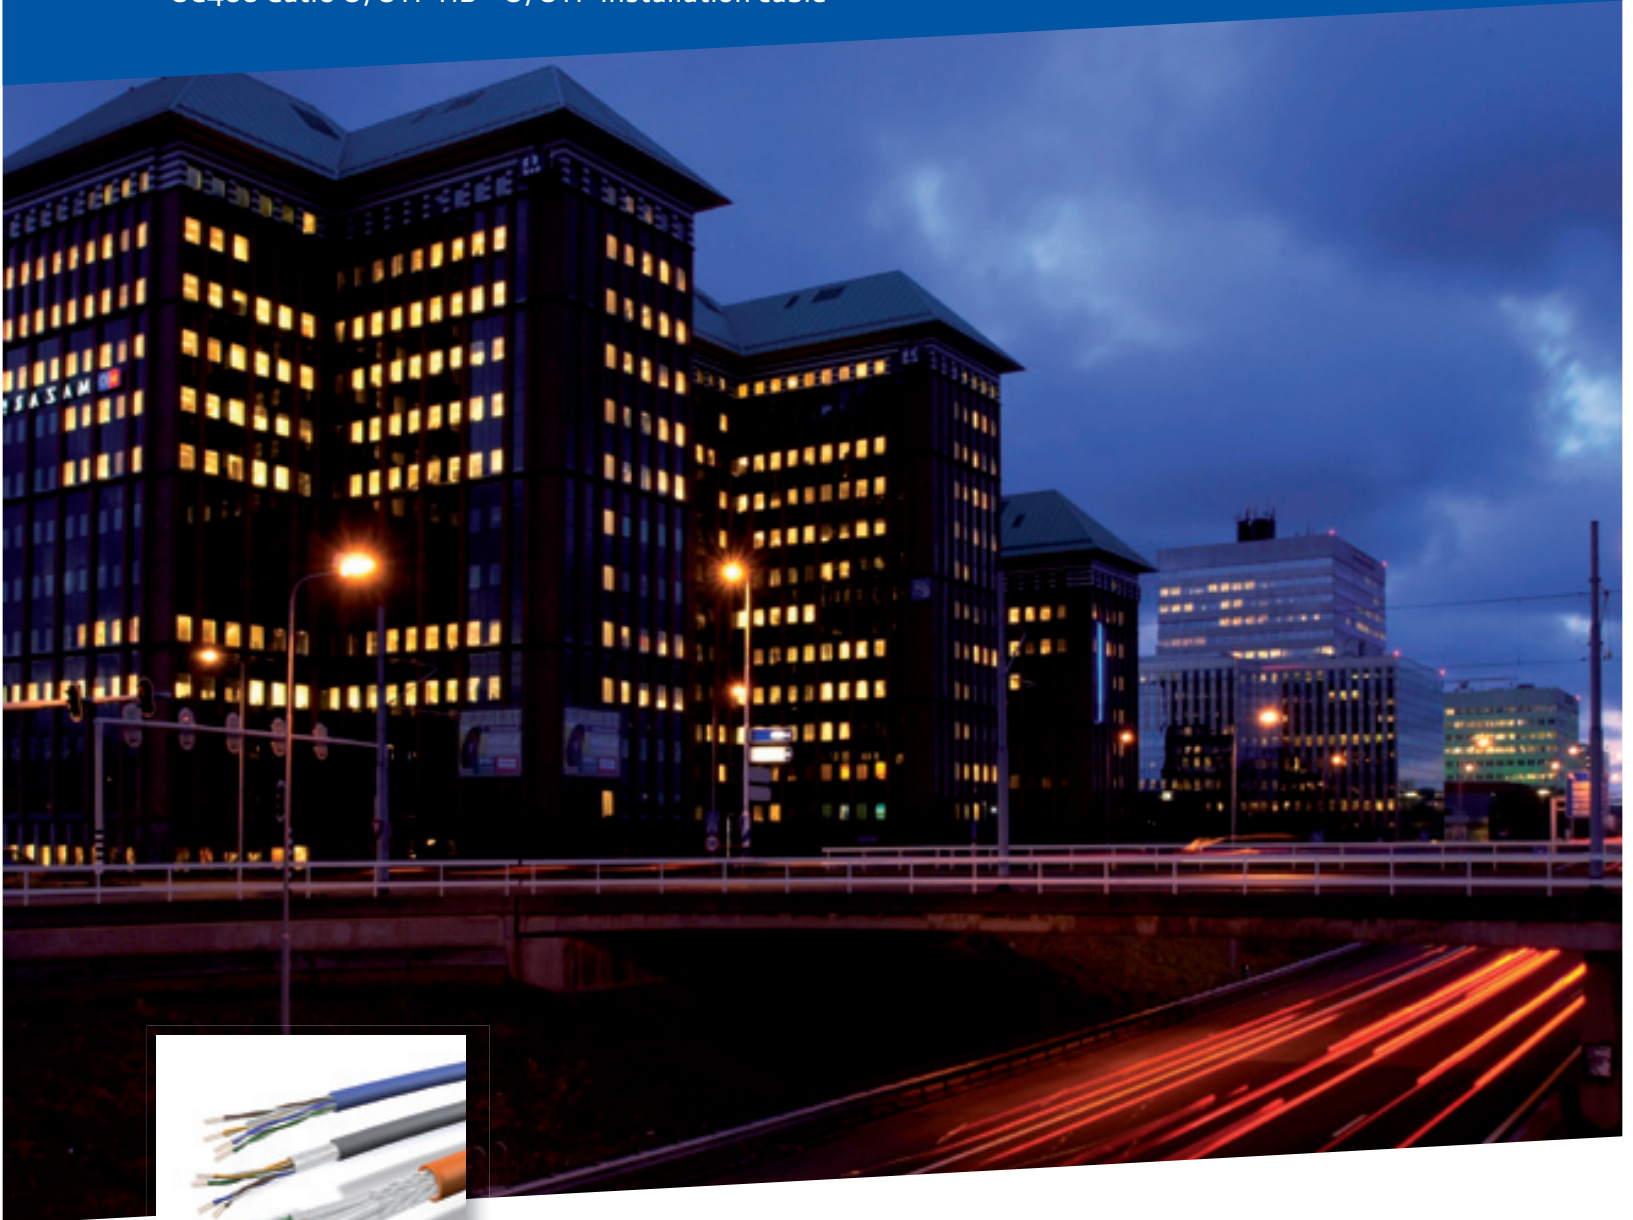


A brand of the

Prysmian
Group

UC400 Cat.6 U/UTP HD

U/UTP Installation cable

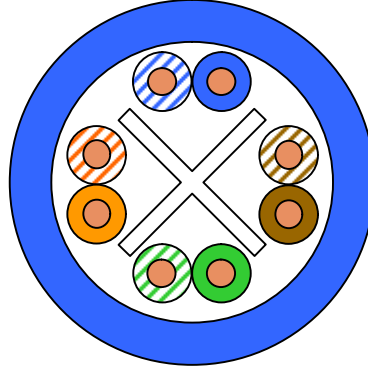

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards

EIA/TIA-568-C.2
ISO/IEC 11801 2nd ed; IEC 61156-5
EN 50173-1, EN 50288-6-1

Flame resistance

PVC: IEC 60332-1
LSHF: IEC 60332-1; IEC 60754-2; IEC 61034

Construction

Conductor	Bare copper wire: Nom. 0,54
Insulation	Polyethylene, Ø 0.95 mm nom
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core non-metallic cross separator (spline)
Sheath	PVC or LSHF (FRNC, LSOH), blue RAL 5012

Mechanical properties

Minimum bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	during operation	-20°C up to + 60°C
	during installation	0°C up to + 50°C

UC400 Cat.6 U/UTP HD

Electrical properties

at 20°C

DC loop resistance	≤ 176 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 5000 MΩ *km
Capacitance at 800 Hz	Nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Mean impedance 100 MHz	100 ± 5 Ω
Nominal velocity of propagation	Approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core	

Electrical data (nominal)

acc. to Cat.6 (at 20°C)

f (MHz)	Attenuation (dB/100m)		NEXT (dB)		PS-NEXT (dB)		ACR (dB/100m)		PS-ACR (dB/100m)		ELFEXT (dB/100m)		PS-ELFEXT (dB/100m)		Return loss (dB)
	max.	Nom.	min	nom.	min.	Nom.	Min.	Nom.	Min.	Nom.	min.	Nom.	min.	Nom.	min.
	1	2.1	1.9	74	78	72	75	72.0	76.1	70.0	73.1	68	82	65	80
4	3.8	3.8	65	69	63	66	61.2	65.2	59.2	62.2	56	70	53	68	23
10	6.0	6.0	59	63	57	60	53.0	57.0	51.0	54.0	48	62	45	60	25
16	7.6	7.6	56	60	54	57	48.4	52.3	46.4	49.3	44	58	41	56	25
20	8.5	8.5	55	59	53	56	46.5	50.0	44.5	47.0	42	56	39	54	25
31.2	10.7	10.7	52	56	50	53	41.3	45.0	39.3	42.0	38	52	35	50	23.6
62.5	15.5	15.1	47	51	45	48	31.5	36.0	29.5	33.0	32	46	29	44	21.5
100	19.9	19.1	44	48	42	45	24.1	28.9	22.1	25.9	28	42	25	40	20.1
125	22.5	21.3	43	47	41	44	20.5	25.2	18.5	22.2	26	40	23	38	19.5
155.5	25.4	23.8	42	45	40	42	16.6	21.3	14.6	18.3	24	38	21	36	18.8
175	27.1	25.3	41	44	39	41	13.9	19.1	11.9	16.1	23	37	20	35	18.4
200	29.2	27.0	40	44	38	41	10.8	16.5	8.8	13.5	22	36	19	34	18.0
250	33.0	32.0	38	42	36	39	5.0	10.0	2.0	7.0	20	34	17	32	17.3
300		36.1		41		38		4.8		1.8		32		30	
400		41.7		39		36		-2.7		-5.7		30		28	

Technical data

Product code	Product name	Outer diameter mm	Fire load		Weight kg/km	Copper index kg/km	Tensile force N
			MJ/km	kWh/m			
1022834	UC400 Cat.6 U/UTP HD 4P LSHF (blue)	5.3	316	0.087	36	18,1	100
1029291	UC400 Cat.6 U/UTP HD 4P PVC (blue)	5.3	300	0.080	36	18,1	100
1029766	UC400 Cat.6 U/UTP HD 4P PVC (grey)	5.3	300	0.080	36	18,1	100

[PRODUCT CODE TABLE]

UC400 Cat.6 U/UTP HD

© PRYSMIAN GROUP 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.