


## UC500 S23 Cat.6<sub>A</sub>

### U/FTP

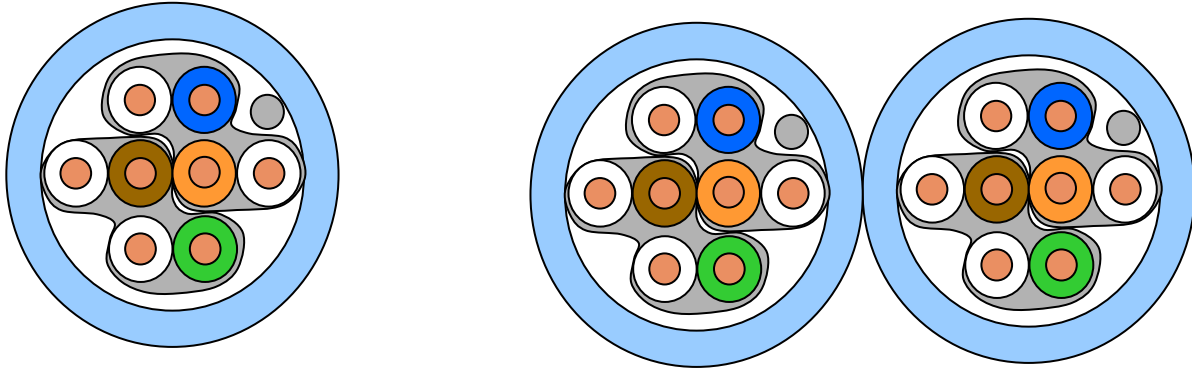

### Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)  
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T  
IEEE 802.5 16 MB; ISDN; FDDI; ATM  
Power over Ethernet (PoE) / PoE+

### Standards

EIA/TIA-568-B.2-10 Draft 5.0  
ISO/IEC 11801 2<sup>nd</sup> ed.; IEEE 802.3at  
EN 50173-1  
EN 50288-10 Draft  
IEC 61156-5 (46C/783/CDV)

### Flame resistance

LSHF(FRNC): IEC 60332-1; IEC 60754-2; IEC 61034

### Construction

Conductor	bare copper wire, Ø 0.56 mm (AWG23)
Insulation	Foamskin Polyethylene, Ø 1.35 mm
Twisting	2 cores to the pair
Pair screen	<b>High Performance STP:</b> Al-laminated plastic foil, patented wrapping of two pairs each, drain wire AWG26 tinned
Cable lay up	2x2 pairs to the core
Sheath	LSHF, blue RAL 5024

## UC500 S23 Cat.6<sub>A</sub>

### Mechanical properties

Bending radius	Installation	8 x Outer diameter
	Installed	4 x Outer diameter
Temperature range	During operation	-20°C to + 60°C
	During installation	0°C to + 50°C

### Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 176 Ω /km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 2000 MΩ *km
Mutual capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km
Mean characteristic impedance	(1-100 MHz)	(100 ± 15)
Nominal velocity of propagation		Ca. 79 %
Propagation delay	Nominal	< 450 ns/100m
Delay skew	Nominal	< 15 ns/100m
Test voltage	(DC, 1 min) core/ core and core/screen	1000 V
Transfer impedance	at 1 MHz	≤ 50 mΩ /m
	at 10 MHz	≤ 100 mΩ /m
	at 30 MHz	≤ 200 mΩ /m
	at 100MHz	≤ 1000 mΩ /m
Coupling attenuation		≥ 55 dB

### Electrical data (nominal)

 acc. to Cat.6<sub>A</sub> (at 20°C)

F (MHZ)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1.0	1.8	100	97	98	95	105	105	-
4.0	3.4	100	97	97	94	105	102	27
10.0	5.4	100	97	95	92	97	94	30
16.0	6.8	100	97	93	90	93	90	30
20.0	7.7	100	97	92	89	91	88	30
31.2	9.6	100	97	90	87	87	84	30
62.5	13.7	100	97	86	83	81	78	30
100.0	17.4	100	97	83	80	77	74	30
125.0	19.5	95	92	75	72	75	72	26
155.5	21.9	94	91	72	69	73	70	26
175.0	23.3	93	90	70	67	72	69	25
200.0	25.0	92	89	67	64	71	68	25
250.0	28.1	90	87	62	59	69	66	24
300.0	30.9	89	86	58	55	67	64	24
400.0	38.3	87	84	48	45	64	61	23
500.0	44.8	85	82	40	37	61	58	22

## UC500 S23 Cat.6<sub>A</sub>

### Product order data

Product code	Cable type	Brand name	Outer diameter mm	Fire load		Weight kg/km	Copper content	Tensile force
				MJ/km	kWh/m			N
1003514	J-02YS(St)H 4x2x0.56	UC500 S23 Cat.6 <sub>A</sub> 4P LSHF	6.9	493	0.137	45	24	100
1014100	J-02YS(St)H 2x4x2x0.56	UC500 S23 Cat.6 <sub>A</sub> 2x4P LSHF	6.9 x 13.9	986	0.274	90	48	200

### Certificates



### Product Code Table

Product Description	Product Code	PG Reference Code	PG Part Number
UC500 S23 C6A U/FTP 4P LSHF 305BR	1003514-00305BR	--	60011113
UC500 S23 C6A U/FTP 4P LSHF 500DW	1003514-00500DW	--	60011412
UC500 S23 C6A U/FTP 4P LSHF 1000DW	1003514-01000DW	--	60011413
UC500 S23 Cat.6a U/FTP 4P LSHF	1003514-00500DP	60015537	60013266
UC500 S23 C6A U/FTP 4P LSHF		60015537	60015537
UC500 S23 C6A U/FTP 2x4P LSHF		60015554	60015554
UC500 S23 C6A U/FTP 2x4P LSHF 500DW	1014100-00500DW	60015554	60015555
UC500 S23 C6A U/FTP 2x4P LSHF 500DP	1014100-00500DP	60015554	60015557

© PRYSMIAN GROUP 2011, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.