

**UC<sup>FIBRE™</sup> O STD DA PE PA 8.5 kN**


**Stranded loose tube, 144 – 864 fibres, 24 fibres per ø2.8 mm tube, yarn reinforcement, black PE sheath, orange PA overshath**

DIN/VDE A- DQ (ZN) 2Y 4Y

NO

FR

DK

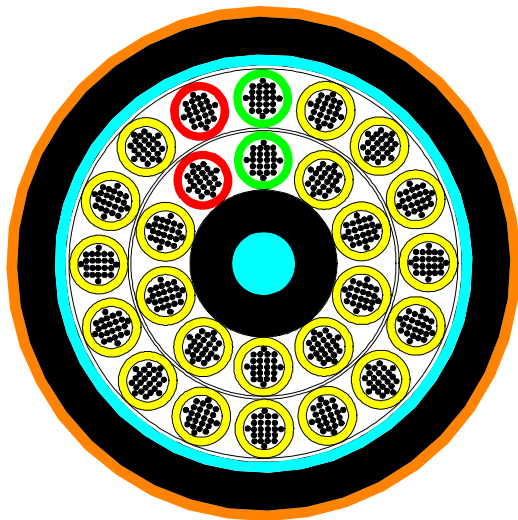

## Application and Installation

This ultra high fibre count cable is suitable for connecting large scale data centres, campus backbones and for telecom networks.

The low friction coefficient of the PA surface gives greatly improved flooding distances during flooding of cables into ducts.

In addition improved blowing distances are obtained.

The hard surface of the PA 12 jacket gives the cable a degree of rodent protection, effective in many cases. PA 12 is halogen free.

## Standards

EN 187 000  
IEC 60794-3  
IEC 60794-3-10  
IEC 60794-3-12  
ISO 11801 2nd edition  
EN 50173-1:2002

*Note: The Draka policy of continuous improvement may cause in changed specifications without prior notice*

# UC<sup>FIBRE™</sup> O ST D DA PE PA 8.5 kN

## Construction

Central strength member	Ø 3.0 mm FRP rod		
Fibre colour code	1	Red	13 Yellow w/mark per 70 mm
	2	Green	14 White w/mark per 70 mm
	3	Blue	15 Grey w/mark per 70 mm
	4	Yellow	16 Turquoise w/mark per 70 mm
	5	White	17 Orange w/mark per 70 mm
	6	Grey	18 Pink w/mark per 70 mm
	7	Brown	19 Yellow w/mark every 35 mm
	8	Violet	20 White w/mark every 35 mm
	9	Turquoise	21 Grey w/mark every 35 mm
	10	Black	22 Turquoise w/mark every 35 mm
	11	Orange	23 Orange w/mark every 35 mm
	12	Pink	24 Pink w/mark every 35 mm
Lose tube	Ø 2.8 mm jelly filled loose tubes, with 24 fibres each, up to 36 tubes in 3 layers, for lay-up refer to B04		
Water blocking	The core is completely filled with a synthetic filling compound, IEC 60811-5-1		
Wrapping	Tape		
Reinforcement	Layer of glass fibre roving		
Ripcord	Polyester ripcord for easy slitting the sheath		
Sheath	1.5 mm black MDPE, IEC 60811, IEC 60708		
Jacket	0.5 mm orange PA 12		

## Fire rating

None

## Physical properties

IEC 60974-1-2

Tensile strength (dynamic)	E1	>8.5 kN	
Tensile strength (permanent)	E1	>5 kN	
Compressive strength (crush)	E3	3000 N	
Impact	E4	15 Nm	
Torsion	E7	5 cycles ± 1 turn	
Kink	E10	The cables do not form a kink when a loop is drawn together to a diameter 12 times the cable nominal diameter	
Temperature range	F1	Operation and installation	-25 °C to 60 °C
		Storage	-40 °C to 60 °C
Water penetration	F5	No water on free end	

Note: The Draka policy of continuous improvement may cause in changed specifications without prior notice

## UC<sup>FIBRE™</sup> O ST D DA PE PA 8.5 kN

### Mechanical properties

Fibre count	Number of layers	Nominal diameter	Nominal cable weight	Minimum bending radius
Up to 144	1	14 mm	180 kg/km	160 mm
168, 192	1	16 mm	204 kg/km	210 mm
216, 240	1	18 mm	228 kg/km	260 mm
264, 288	1	20 mm	252 kg/km	320 mm
312 - 432	2	20 mm	252 kg/km	320 mm
456 – 528	2	22 mm	276 kg/km	380 mm
552 – 624	2	25 mm	312 kg/km	490 mm
864	3	27 mm	400 kg/km	580 mm

### Product codes – ordering information

Item No.	Fibre count	Product code	Fibre type	Fibre data sheet

*Note: The Draka policy of continuous improvement may cause in changed specifications without prior notice*